

# Assessment Utilization of Concrete Mixers in Selected Construction Sites in Abuja

**UMAR Bello & ALHASSAN Ishaq Sani**

Department of Building, Ahmadu Bello University, Zaria.

**Corresponding Author:** [b.umarbd@gmail.com](mailto:b.umarbd@gmail.com)

## Abstract

Research have shown that proper utilization of concrete production equipment provides considerable cost saving in construction. However, there is little research evidence on concrete mixer utilization on Nigerian construction sites. This limits profitability of concrete production to contractors. This paper aims at assessing the utilization of concrete mixers on construction sites with a view of enhancing cost savings in concrete production. The study was carried out on some selected construction sites in Abuja. 25 construction sites operated by different contractors were used in the study. The research adopted mixed methodology. Quantitative data was gathered using structured questionnaire to identify the level of utilization of concrete mixers. Qualitative data was gathered through observation with a checklist on the type of concrete mixers and impediments to performance of the mixers. The study discovered that the commonest type of concrete mixer used by contractors are reversing drum and tilting drum mixers. The study also found that concrete mixers are underutilized through wrong selection criteria, inability to use only trained personnel to operate the mixers, not having spare parts for the mixer before breakdown, and inappropriate methods of operating the mixers. The paper recommends mixers to be selected for jobs based on their suitability for the job, using only trained personnel to operate mixers, provide important spare parts for the mixer before it breakdown, and only operate concrete mixers based on manufactures instruction.

**Key words:** Concrete, Concrete production, Concrete Mixers, Construction Equipment, Cost Saving, Efficiency, Utilization, Abuja Nigeria

## Introduction

Globally, Construction companies of today depends on construction equipment and machinery for basic reason of better efficiency at lower cost (Richard, 2005). With growing complexity in construction works, equipment and machinery become even more vital to productivity, efficiency and safety (Waris, Liew, Khamidi, & Idrus, 2014). Moreover, Waris et al (2014) highlighted that the complexity of equipment needed for construction work is subject to the nature of the project. Waris et al. (2014) further opined residential construction projects require a low-level usage of machinery; while institutional building require moderate use of machinery, but industrial, commercial and

infrastructural buildings require intense use of heavy machinery and equipment.

Similarly, Richard (2005) sustained that to advance construction, processes in construction must be mechanized or automated. Similarly, due to the complexity of the construction industry which is often bewildered by inefficiencies (Kamaruddin, Mohammad & Mahbub, 2016), Kamaruddin et al (2016) supports that mechanization and automation has become not only necessary in construction, but a must if the industry is to meet the growing demand for housing and infrastructure.

Furthermore, Sani, Idris and Adam (2015) believe the objective of any contractor from inception to completion of any project is to

deliver the project with in time, at least possible cost and of acceptable quality. For this reasons, Sani et al (2015) suggest building contractors to adopt mechanization of works in order to save time and cost while improving efficiency of construction processes since machines are less prone to making errors when compared to human labour. Moreover, Gransberg, Popescu and Ryan (2006) observed that construction contractors undertake many types of construction activities that require different types, sizes, and groupings of equipment for concreting, earth moving, excavating, and lifting. Furthermore, Granberg et al (2005) identified that there is a piece of equipment for practically any work activity, large or small. Furthermore, the working capacity of construction machinery is a direct function of the size of the machine and the power of the motor. These simple relationships exist — the larger the machine, the more power required for the operation, the greater the production capacity, and the greater the cost to own and operate Granberg et al (2005).

Moreover, small-scale construction sites in developing nations like Nigeria are characterized by high Labour intensity with application of simple items of machinery particularly concrete mixers (Abosedo et al, 2019). However, in spite of its wide utilization on construction site in Nigeria, the requisite attention has not been paid to the utilization of concrete mixers in Nigeria. Consequently, Researchers such as Waris et al (2014) and Kamaruddin (2016) have agitated for wider use of construction equipment on construction sites. While Abosedo et al (2019), Danjuma (2014) have observed that concrete mixers are commonest construction equipment found in most small and medium size construction firms in Nigeria.

In addition, Granberg et al (2005) demonstrate that for a construction equipment to be economical, it must be fully utilized in accordance to the instruction of its manufacturer. The situation is the same whether the machinery is owned or hired. Machine economy depends on correct application. It is therefore vital to

understand the correct way to use common construction equipment on construction sites. However, though researchers have identified the need for equipment on construction sites, and commonality of mixers on construction sites in Nigeria, little is known on how mixers are utilized especially in small and medium scale construction companies in Nigeria. Consequently, this paper seeks to explore how concrete mixers are utilized in small and medium size construction companies in Nigeria, the common type of mixers used in the construction sites and the impediments to optimal utilization of the concrete mixers.

### ***Construction plant and equipment***

Edward and Holt (2009) define construction plant as self-propelled machines designed to do work. Items of plant includes machines such as excavators, compaction rollers, and specialist apparatus – like trenchers or telehandlers. Edward and Holt (2009) further added that construction plants includes machines able to access the public highway, such as concrete delivery Lorries and mobile cranes.

On the other hand, Edward and Holt (2009) define construction Equipment as all other types of mechanized construction work apparatus such as static cranes, concrete pokers, hand-held tools and specialist equipment such as floor polishers. To be specific, Edward and Holt (2009) clarify that the plant is often used to also include equipment.

### ***Efficiency of Construction Plant and Equipment***

For construction plant and equipment to be effective in cost saving during its operation, Chudley and Greeno (2006) opined that the type of plant to be considered for selection should depend upon the tasks involved, the time when the work is to be carried out, the skills of staff available to handle the machine. while Waris et al (2014) argues the selection process of a machinery for construction need the most rational criteria that have a positive impact on operational efficiency, productivity, cost minimization and as well as environmental and human

wellbeing. Furthermore, Chudley and Greeno (2006) suggested the person responsible for selecting machinery plant must be competent, and the plant operator must be a trained person in order to obtain maximum efficiency. Additionally, manufacturer's recommended maintenance schedule for the plant must be followed and, above all, the site layout and organization must be planned with a knowledge of the capabilities and requirements of the plant (Chudley & Greeno, 2006).

### ***Barriers to Effective utilization of construction Plant and Equipment***

The most common barrier to effective utilization of construction plant and equipment identified by different researchers has to do with finance and economy (Enshassi, Ayash & Mohamed, 2017); Mahbub, 2008). Mahbub (2008) found that the use of construction machinery requires substantial financial commitment for acquiring, maintenance, training and training of personnel to operate the machinery. Therefore, this financial requirement limits most contractors from choosing the right machinery and competent personnel to operate the machines for their jobs, but instead use the available machines they can and available and affordable personnel to operate the machine.

The next key barrier to effective utilization of construction plant and equipment identified by Enshassi et al. (2017) is knowledge and information. Kamaruddin, et al. (2016) explained that knowledge barrier refers to limitation on technical know how about particular construction machine within an organization, while the information barrier refers to limitation on availability or access to information relating to the construction machine outside the organization. Therefore, where an organization does not have the requisite technical know about the operation of a particular construction machine, or does not have access to information relating to the machine, the organization cannot effectively utilize the machine.

### ***Concrete Mixers***

A concrete mixer (also commonly called a cement mixer) is a device that homogeneously combines cement, aggregate such as sand or gravel, and water to form concrete (The constructor, 2022). Mixing of concrete is almost invariably carried out by machine for reinforced concrete work and for medium or large-scale mass concrete work. Machine mixing is not only efficient, but also economical, when the quantity of concrete to be produce is large (Shetty 2006). There are two main categories of concrete mixers, which are continuous mixers and batch mixers (The Constructor, 2023).

#### ***Types of concrete mixers***

##### **Continues Mixers**

Continuous mixers produce concrete at a constant rate (Ferraris 2001). The constituents are continuously entered at one end as the fresh concrete exits the other end. In continuous mixer, the weighing, loading, mixing and homogenizing of concrete ingredients as well as discharge of concrete occur continuously and simultaneously (Shwe-Sin 2018). A typical continues mixers is presented in Plate 1A.

##### **Batch Mixers**

Batch mixers produces concrete one batch at a time (Ferraris 2001). Here concrete needs to be emptied completely out of the drum after each mixing cycle, cleaned (if possible), and reloaded with the materials for the next batch of concrete. According to Shwe-Sin (2018), Batch mixer is most common types of mixer. A typical Batch mixer Is presented in Plate 1B. Batch mixers may be of pan type or drum type. The drum type may be further classified as tilting, non-tilting and reversing drum mixers.

##### **Tilting Drum, Batch Mixer**

A tilting drum mixer is a type of concrete batch mixer whose drum has two axes: one around which the drum rotates and another that serves to change from loading and mixing position (drum opening up) to discharging position (drum opening down). Material is generally loaded manually, directly into the drum. After being filled

manually at ground level, the hopper is tilted up mechanically and dumps the material into the drum (Shwe-Sin, 2018). The discharge action is always good as all the concrete can be tipped out rapidly. An example of Tilting drum mixer is presented in Plate 1C.

#### **Non-tilting drum, Batch mixer**

A non-tilting drum concrete batch mixer have two openings, one at each end of the drum: one for feeding the ingredients, the other for discharging the mixture. Discharge takes place by inserting a chute into the drum because of the rather slow rate of discharge, segregation may occur (Shwe-Sin, 2018). Non-tilting drum mixer can be seen in Plate 1D

#### **Reversing Drum, Batch Mixer**

A reversing drum, batch concrete mixer has only one opening which is used to add the constituents and to discharge concrete. There are two types of blades attached to the drum. One set mixes the materials when the drum rotates in one direction; second set of

blades empties the concrete when the drum rotates in the other direction (Shwe-Sin, 2018).

#### **Pan, Batch Mixer**

A Pan type mixer consists of a circular pan in which concrete is mixed. (Shwe-Sin, 2018). It uses mechanical power to combine the constituents, because of this, mixing is much more thorough and all type of concrete can be produced. Generally, the mixture of concrete is discharged from the bottom of the pan. (Ferraris 2001).

#### **Transit Mixers**

Shwe-Sin (2018) defined transit mixer as a piece of equipment that is used for transporting concrete or ready mix material from a concrete plant directly to the site. They can be charged with dry materials and water, with the mixing occurring during transport. They can also be loaded from a central mix plant with this process the material has already been mixed prior to loading (Shwe-Sin 2018). A pan mixer can be seen in Plate 1F.



Plate 1A: A Continuous Mixer



Plate 1B: A tilting drum mixer



Plate 1C: A non-tilting drum mixer



Plate 1D: A reversing drum mixer



Plate 1E: A Pan mixer

Plate I: Different types of concrete mixers

Source: The constructor.org

### ***Efficiency of concrete mixers***

The efficiency of a mixer may be viewed in terms of quantity or quality of concrete produced per unit of time. However, mixer efficiency is used to qualify how well the mixer produce a uniform matrix of concrete in a unit time (Shwe-Sin, 2018).

Output Rate as a good indicator used in determining efficiency of mixers. Shwe-Sin (2018) describe output rate as the amount of concrete produced per a time interval. The output rate is not the measure of the homogeneity of the concrete produce, but a measure of number of batches produced by the mixer in a unit of time (Shew-Sin, 2018). Mixing energy is another variable used in determining efficiency of a concrete mixer. It is a measure of amount of energy expanded by the mixer to produce each batch. A mixer that require height amount of

energy may produce segregated concrete. Therefore, the mixing energy of a mixer should be kept low.

Another important measure of mixer efficiency is wear and tear, which determine mixer cleanliness (Shwe-Sin, 2018). Long usage of a mixer leads to wear of its components such as the blades. Wear and tear may also lead to build-up of materials such as cement paste) on the drum surfaces. Wear and build –up will change the geometry of the mixer and therefore the flow pattern of the concrete, and may lead to changes in the concrete mixer should be thoroughly cleaned at the end of each day of operation and the blades and/or scraper changed on a regular schedule (Shew-Sin, 2018).

## **Methodology**

This paper adapted a mix research design for its inquiry. Kothari (2012) define research design as a plan, structure and strategy of investigation so conceived as to obtain answers to research questions or problems. Kothari (2012) further adds that the plan is the complete scheme or programmed of the research. It includes an outline of what the investigator will do from writing the hypotheses and their operational implications to the final analysis of data.

However, Johnson, Onwuegbuzie and Turner (2007) upheld the use of mixed or triangulation where the research objective is to explore why and how. According to Johnson et al (2007) use of mixed method in research cancelled out bias inherent with qualitative method and lack of rigor associated with quantitative approach. Consequently, this paper adapted mixed research methodology.

The study of this paper was carried out in FCT Abuja. The study was carried in active construction sites owned by small to medium size construction companies. The paper focus on the use of concrete mixers by small and medium size construction companies. Abdulazeez (2012) classified small and medium construction companies as those companies with permanent employee of less than 50, or annual turnover of less than 100 million naira. This class of construction companies were selected because of their frequent use of concrete mixers on construction sites and the impact of concrete production has on construction cost (Hanun, et al, 2018). A total of 25 construction sites operated by small and medium size construction companies were purposively selected for the study. The sampling technique used is the purposive sampling since the research is targeting specific criteria which is not consistent throughout the population.

This paper utilized a mixed research methodology. Qualitative data was gathered on how concrete mixers are utilized through observation and a checklist. The observation was accompanied with question to clarify

what was observed. Quantitative data was gathered relating to the type of concrete mixers utilized on construction site through structured questionnaire

## **Results and Discussions**

### ***Background of respondents***

This subsection presents the background information of the respondents who attended to the researcher in the 25 constructions sites operated by different construction companies which were used in the study. The respondents are onsite professional on construction sites who were responsible managing the construction sites. They oversee usage of concrete mixers on their sites among other duties. The summary of the respondents' background information is presented in Table 1.

Table 1 presents background information relating to respondents' highest academic qualification, profession and years of on-site work experience with concrete mixers. The purpose of the data is to demonstrate the respondents' capability in responding to the questions.

The results show that all the respondents have at least Ordinary National Diploma (OND). This shows that the respondents are literate enough to understand technical discussion. Furthermore, the result shows that majority (78%) of the respondents have obtained at least first degree or its equivalent. This shows that the respondents have the ability to not only understand the question, but also respond meaningfully to the questions.

Similarly, this indicates that majority (78%) of the respondents are professionals in the built environment. Therefore, they are knowledgeable enough to understand construction related discussion and also provide reasonable responses in relation to subject of concrete mixers. Furthermore, the years of experience of the respondents working on site with concrete mixers shows that majority respondent (78%) have a work experience of 5 or more years. Therefore, the respondents are expected to have

experience in the operation of concrete mixers on site.

***Type of concrete mixers used by small and medium size construction companies***


The first objective of this paper is ascertain the common type of concrete mixer used on construction sites operated by small and medium sized construction firms. The Data on type of mixer used on construction site was gathered through observation using a checklist. Result of the common type of mixer used is presented in Figure 1.

Result in Figure 1 shows that the common concrete mixers used on construction sites operated by small and medium size

construction companies are Tilting drum mixers (46% of the sites), Reversing drum (31%), Non tilting drum (14%) and mobile mixers (4%). Moreover, the result also shows that the commonest mixer found on the site are Tilting drum then reversing drum concrete mixers. This could be attributed to that this type of mixers are relatively less expensive, are readily available to hire and are easy to operate and maintained. Therefore, since the main determinant for the choice of mixer is influenced by cost, the result aligned with the findings of Enshassi et al. (2017) who identified cost and economy as the common barriers to effective utilization of construction plant and equipment.

**Table 1: Respondents background information**

Item	Observations	Frequency	Percentage
Highest Academic Qualification	OND	3	12
	First Degree or Equivalent	14	56
	Master Degree	6	24
	PhD.	2	8
	<b>Sum</b>	<b>25</b>	<b>100</b>
Profession	Building	6	24
	Engineering	7	28
	Architecture	6	24
	Quantity Surveying	3	12
	Others	3	12
	<b>Sum</b>	<b>25</b>	<b>100</b>
Years of Work Experience	Less than 5 years	3	12
	5 - < 10 years	4	16
	10 - <15 years	8	32
	15 - < 20 years	6	24
	More than 20 years	4	16
<b>Sum</b>	<b>20</b>	<b>100</b>	

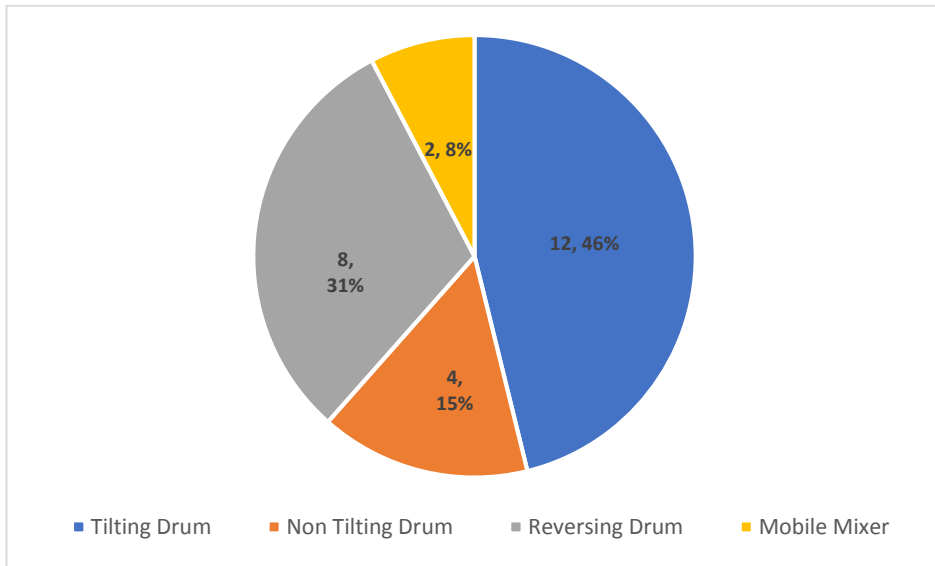

**Figure 1:** Common type of concrete mixers used on construction sites

***Level of utilization of Concrete Mixers***

The level of utilization of the mixers used on the construction sites was investigated in order to understand whether the machines were used optimally or not. Teletrac (2022) provided that equipment utilization can be assessed through observing time of operation and number of batches the machine produces in unit time. Consequently, the operating hours of the mixers and number of batches produced in an hour were recorded through observation. The result is presented in Table 2.

Table 2 presents result on the utilization of the mixers on respondents’ construction sites based on standard International Labor

Organization (ILO) 8-hour working day. Operating hours for the concrete mixers were calculated only for period when work is available for the mixer and it was able to perform the work. Period when there is no work for the machines where not considered.

The data shows 40% of the respondent were under utilizing the mixer by operating it for 5 to 6 hours daily, 40% of the respondents were adequately utilizing their mixers for 7 hours and 8 hours. 20% were found utilizing concrete mixer for more than 8 hours daily. Therefore, it can be said some construction sites are underutilizing concrete mixers by not using their machines.

**Table 2: Utilization of Concrete Mixers**

Item	Observations	Frequency	Percentage
Average Operating Hours in a Day	5 hours per Day	5	20
	6 hours per Day	5	20
	7 hours per Day	2	8
	8 hours per day	8	32
	More than 8 hours	5	20
	<b>Sum</b>	<b>25</b>	<b>100</b>
Number of Batches per hour	10 < 15 Batches	11	44
	15 < 20 Batches	8	32
	20 < 25 Batches	6	24
	25 < 30 Batches	0	0
	<b>Sum</b>	<b>25</b>	<b>100</b>



The number of batches produced in an hour shows that more (44%) of the construction site that uses concrete mixers were able to produce less than 15 batches of concrete in an hour. 32% of the sites were found to produce 15-20 batches per hour, while 24% of sites were producing 20-25 batches of concrete with the mixer per hour. However, Shetty (2006) observed that an optimum use of concrete mixer is that which is able to produce 20-25 batches of concrete per hour. Consequently, it can be said few of the construction sites were optimally utilizing their concrete mixers with regards to number of batches they produced in each hour.

***Impediments to Optimum utilization of Concrete Mixers***

This paper also investigated impediments, which reduces the efficiency of concrete mixers during operation. These alterations reduce either the number of batches produced per hour or number of hours the machine is operational in a day. Gupta and Amit (2012) observed that impediments to proper utilization of concrete mixers are due to choice of mixer, choice of mixer operator, availability of spare parts and operation of the mixer. Table 3 present result of impediments to effective utilization of concrete mixers as a result of choice of mixer, choice of mixer operator and availability of spare parts, while Impediments which arose during operation of concrete mixers are presented in Table 4.

Table 3 shows impediments to optimal utilization of concrete mixers relating to choice of the mixer, the mixer operator and availability of spare parts. The choice of mixer refers what how users select mixers for their projects. The result shows that only 28% of the respondents consider suitability of the mixer for the work. The result shows that construction company mostly consider availability of the mixer and cost when selecting concrete mixer for jobs.. Consequently, since the concrete mixers were not selected based on their suitability for a given work, it is one of the reason why their performance is below optimum. Moreover, Shetty (2006) opined that the choice of construction machinery should be guided by nature of the work and suitability of the machine for the work. Therefore, the result support the assertion of Enshassi (2017) who maintained that finance and economy are the major barrier to effective utilization of construction plant and equipment.

Similarly, the result also shows that most (76%) of the construction sites do not use trained personnel to operate concrete mixers. Consequently, this is also another reason, which limit the performance of concrete mixers. Therefore, since most of the construction sites do not use trained professionals to operate concrete mixers, the result buttress the findings of Kamaruddin et al. (2016) who shows that knowledge and information are key barriers to effective utilization of construction plant and equipment.

**Table 3: Impediments to Effective utilization of concrete mixers**

<b>Impediments</b>	<b>Observations</b>	<b>Frequency</b>	<b>Percentage</b>
Choice of Concrete Mixer	Availability	13	52
	Cost	5	20
	Suitability for the Job	7	28
	Sum	25	100
Mixer Operator	Trained Operator	6	24
	Experienced Foreman	13	52
	Available Labour	6	24
	Sum	25	100
Availability of Spare parts	Readily available before break down	6	24
	Source after break down	19	76
	Sum	20	100

In addition, Table 3 also shows that majority (76%) of the construction sites do not have spare parts of concrete mixer they are using readily available on site. They source the spare parts only after breakdown of the machine. Therefore, this is also another reason, which increase down time of the mixers since more time is needed to source spare parts in the event of breakdown. Table 4 presents impediments to effective utilization of concrete mixers when the mixers are in operation. The impediments are positioning of the mixer, speed of the mixer, inspection and during operation.

Table 4 present result on key aspect of concrete mixer operation which affects the performance of the mixer. The results shows that most (60%) of the construction site do not always place concrete mixers on level position and also do not set maximum speed limit for rotation of the mixer drum. Therefore, this also affects the performance of the mixer. In addition, it can also be seen that only 32% of the site always perform routine inspection of the concrete mixer before and after operation. The impediments presented in Table 4 buttress findings of previous studies (Enshassi et al., 2017; and Kamaruddin et al., 2016) who found that cost and economy, then knowledge and information are the key barriers to effective

utilization of construction plant and equipment.

### Conclusion

The paper conclude that the common type of concrete mixer found on construction sites of small and medium construction companies in Nigeria are tilting and reversing drum mixers. The study found that concrete mixers on the construction sites were underutilized as a result of wrong selection criteria for concrete mixer which was based on availability or cost of the mixer instead of suitability for the job, the inability to use only trained personnel to operate concrete mixers, not having provision of spare parts for the mixer before breakdown, and inappropriate methods of operating concrete mixers.

Consequently, the paper recommends construction managers to select concrete mixers for jobs based on suitability of the mixer for the work, use trained personnel to operate concrete mixers, have a provision for spare parts for the mixer before breakdown and maintained appropriate operation techniques when operating concrete mixers.

**Table 4: Impediments to effective utilization of concrete mixers during operation of the mixers.**

Impediments	Observations	Frequency	Percentage
Positioning of Mixer	Always in a level position	10	40
	Not always in level position	15	60
	Sum	25	100
Speed of the Mixer	Set maximum speed of 20 rev/min	10	40
	Has no speed limit	15	60
	Sum	25	100
Inspection during and after Operation	Always	8	32
	Occasionally	17	68
	Sum	20	100

### References

- AbdulAzeez, A.D. (2012). Developing prototype record management systems for small and medium enterprises in Nigeria. Unpublished PhD Thesis. Department of Building, Ahmadu Bello University, Zaria.
- Abosedo, A.O., Opawole, A., Olubola, B., Ojo, G.K. & Kajimo-Shakantu, K. (2019). Performance analysis of small

- and medium-sized construction firms in Oyo State, Nigeria. *Acta Structilia*, 26(1), pp. 66-96.
- Chudley, R., & Greeno, G. (2006). *Advanced construction technology, 4<sup>th</sup> Edition*. Pearson Education. Harlow, England
- Danjuma, U. (2014). Assessment of utilization of mechanical plant and equipment in Nigeria. Unpublished dissertation, Department of Building, Ahmadu Bello University, Zaria.
- Edward, D.J., & Holt, D.G. (2009). Construction plant and equipment management research: thematic review. *Journal of Engineering, Design and Technology*, 7 (2), 186-206.
- Enshassi, A., Ayash, A., Mohamed, S. (2017). Key barriers to the implementation of energy management strategies in building construction projects. *International Journal of Building Pathology and Adaptation*, <https://doi.org/10.1108/IJBPA-09-2017-0043>
- Ferraris, C. F. (2011). Concrete Mixing Methods and Concrete Mixers: State of the Art. *Journal of Research of the National Institute of Standards and Technology*, 391-399
- Gransberg, D.G., Popescu, C.m., & Ryan, R.C. (2006). *Construction equipment management for engineers, estimators, and owners*. Taylor and Francis. New York.
- Johnson, R.B., Onwuegbuzie, A.J., & Turner, L.A. (2007). Toward a definition of mixed methods research. *Journal of Mixed Methods Research* 2007 (1), 112- 133.
- Hanun, Hanun, Y., Alisjahbana, S.W., Masoem, D., Ikhsan, M.S., Ahmar, A.S. (2018). Designing Cost production of Concrete. 2nd International Conference on Statistics, Mathematics, Teaching, and Research, 1028 (2018) 012063 doi :10.1088/1742-6596/1028/1/012063.
- Kamaruddin, S.S., Mohammad, M.F., & Mahbub, R. (2016). Barriers and Impact of Mechanization and Automation in Construction to Achieve Better Quality Products. *Journal Social and Behavioral Sciences*, 222 (2016), 111 – 120.
- Kothari, R. (2012). *Research methodology; a step by step guide for beginners*, 3<sup>rd</sup> edition. Sage publishers, New York.
- Mahbub, R. (2008). *An investigation into the barriers to the implementation of automation and robotics technologies in the construction industry*. An unpublished PhD Thesis submitted to school of urban development faculty of built environment and engineering Queensland university of technology.
- Richard, R. (2005). Industrialized building systems: reproduction before automation and robotics. *Automation in Construction* 14 (2005) 442– 451.
- Sani, A., Idris, I., Adam, L.Z. (2015). An appraisal into the use of mechanization by indigenous construction firms in north eastern Nigeria. *Proceedings of The Inter-Disciplinary Academic Conference on Uncommon Development*, (4)3,
- Shetty, M.S. (2006). *Concrete Technology theory and Practice*. Ram Nagar, New Delhi: S. Chand & Company Ltd.
- Shwe Sin, M.M. (2018). Design and Calculation of a Concrete Mixer (100 kg). *International Journal of Engineering Research & Technology (IJERT)*, 7(8), 253-257.
- Teletrac. (2022). What is equipment utilization? Sourced at: <https://www.teletracnavman.com/resources/resource-library/faqs/what-is-equipment-utilization>
- Waris, M., Liew, M.S., Khamidi, M.F., & Idrus, A. (2014). Criteria for the selection of sustainable onsite construction equipment. *International Journal of Sustainable Built Environment*, 6(4), <http://dx.doi.org/10.1016/j.ijbsbe.2014.06.002>